

REMOVABLE STEEL TIPPER

BODYWORK

- MAX. load capacity: 5 T
- Tipper platform in steel sheet HX500, thickness 3 mm
- Longitudinal reinforcement spacers
- Sideboards in steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Closing of embedded sideboards
- Steel H350ZMA front face, height 450 mm, thickness 2 mm
- Ladder rack in galvanised steel, with grille (4.5 mm section), removable and without top cap
- Rear door in steel H350ZMA, height 450 mm, thickness 2 mm, 2 leaves and bottom unhooking by manual unlocking
- Stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- 2 rear rolls in aluminium fitted on self-lubricating ring (no greasing)

CRADLE

- IPE 140 frame rails
- Centre distance 1060
- Hook height 920 mm
- Gripper axis diameter 30 welded on tubular structure 120 x 60
- Exterior locking

SAFETY


- Anti-theft device to be locked

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

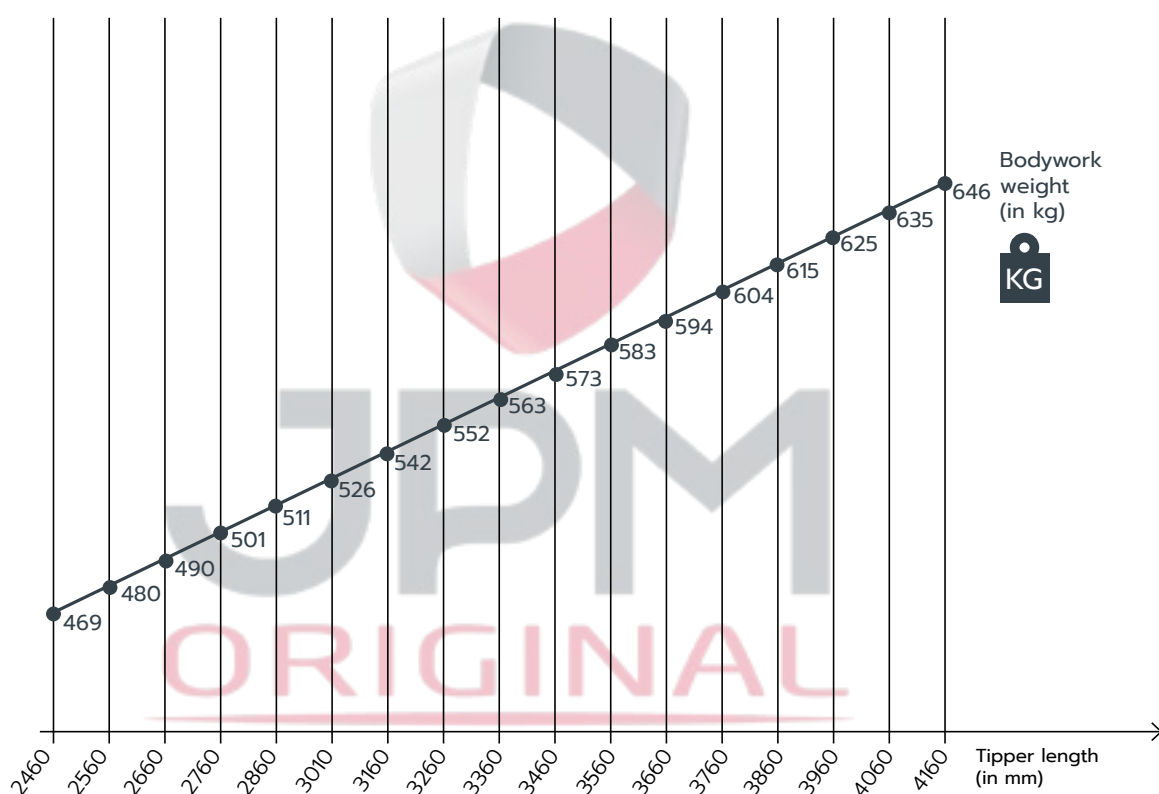

AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK

2-YEAR GUARANTEE

On purchasing
your bodywork

3-YEAR GUARANTEE

3rd year free
after registering
your bodywork

5-YEAR GUARANTEE

JPM offers
a 2-year guarantee
extension