

RANGE
JPM ORIGINAL



French Manufacturer



2024 Edition





French industrial expertise

Since 1966 JPM has constantly improved, developed and industrialised.

JPM staff create and manufacture robust, reliable and durable bodies, which are real work tools.





When the users of vehicle bodies become the inspiration for their work tools

You are the person who understands your trade. JPM is only the creator of your work tool.

No-one is better than you to tell us how it is used.

We have discussions with you to create your future work tools: robust, guarantors of your health and safety, completely suitable for your trade and meeting the environmental challenges.





Stronger together

JPM is nothing on its own. The JPM group is very effective.

The JPM group is the union of three skills which interact, are complementary and the major aim of which is your welfare at work.

- JPM users, the inspiration for work tools*
- JPM staff, creators of work tools*
- JPM distributors, distributors of work tools*



JPM SERVICE



Wrap your work tools in tranquillity

JPM distributors are true guardians of your work tools. They are part of your peace of mind by advising you, enriching and maintaining your JPM equipment on their premises or yours or even on your work site. And added to this:

- Bodywork that can be personalised at any time during its life*
- An e-commerce website offering JPM options and spare parts*
- A third year of guarantee free-of-charge*





The bodywork expertise for work tools suitable both for the world of today and that of tomorrow

Today JPM creates the work tools you will need tomorrow.

We carry out technology and regulatory watches so that your work tools are the most suitable for the constraints and opportunities of our world and that of the future.

JPM makes its expertise available to you: the bodywork configurator offers bodywork suitable for your vehicle and calculates its payload.



Bodywork, occupational options and service!

About us

- 2 · French industrial expertise
- 4 · When the users of vehicle bodies become the inspiration for their work tools
- 6 · Stronger together
- 8 · Wrap your work tools in tranquillity
- 10 · The bodywork expertise for work tools suitable both for the world of today and tomorrow

Choose your bodywork

- 16 · **Aluminium version**
 - Rear tipper 55
 - Entreprise three-way tipper
 - Dropside
- 30 · **Mixed aluminium Version**
 - Rear tipper 55
 - Removable tipper
 - Dropside, wood platform
- 44 · **Steel version**
 - Rear tipper 55
 - Rear tipper 75
 - Removable tipper
 - Dropside

Take advantage of JPM services

- 72 · A local distribution network
- 74 · 3rd year of guarantee free
- 76 · Bodywork configurator
- 78 · Customisable bodywork

See our trade customisations

- 82 · Landscape gardening
- 84 · Garden maintenance
- 86 · Pruning
- 88 · Carpenter roofer
- 90 · Builder
- 92 · Civil engineering
- 94 · Local authorities

Add your JPM options

- 100 · Doors
- 106 · Load securing
- 126 · Work site securing
- 132 · Storage
- 146 · Tipper access
- 152 · Protection
- 156 · Coupling
- 160 · Safety



Quality management



Environmental management






JPM

ORIGINAL

The fair price for equipment that is
ROBUST, DURABLE, LIGHT AND VERSATILE

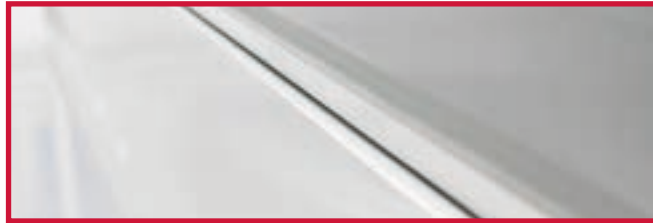



Aluminium version

REAR TIPPER MODEL 55*

ALUMIN-
IUM

MIXED
ALUMIN-
IUM

STEEL



**Up to 5T5 GVWR*

Video available at
www.jpm-group.com





1

Robustness


Identical mechanical resistance to that of the steel tipper



2

Payload

Additional 236 kg for a 3260 mm aluminium tipper compared with its steel equivalent



3

High tipping capacity

4T4 for a 3260 mm tipper
(load uniformly distributed)



4

Double safety handle

Incorporated into the sideboard



5

Resistance and watertightness

Boxed sideboard with sealing lip, large surface for stickers



6

Optimised hinge

Stops travel for the sideboard



7

Long life

Conical pillars with clamping screw and top hinge with double safety device



8

Optimum visibility

Compact: no top cap, optional load stops



9

Reliability of door opening

Direct connection between tipper and hook



10

No lubrication

Self-lubricating ring

REAR TIPPER

MODEL 55*



BODYWORK

- Tipper platform in high quality aluminium sheet: 5083 H16 thickness 3.5 mm
- Side members in extruded box-sections, thickness 3 mm, height 120 or 140 mm (depending on length) and outer frames in box-sections, thickness 3.5 mm under the load surface
- Sideboards in extruded aluminium profile, height 400 mm (385 mm interior), double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, fold-down, removable, interchangeable (right/left)
- Locking handle incorporated into the thickness of the sideboards
- Front face, interior usable height 450 mm, double wall top and bottom, thickness 2.6 mm, single wall, thickness 3.5 mm in the centre
- Cab Protect with aluminium mesh diameter 5 mm with frame in extruded profiles, removable and without top cap
- Aluminium rear door, height 450 mm, double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, automatic opening by cam of 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with tightening fixing bolt and conical fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication
- Outer frame adapted to lashing
- Short tipping overhang: 250 mm

SUBFRAME

- Aluminium profile tipper, thickness 4.5 to 12 mm
- Tipping by 3 or 4 expansion CYLINDER depending on length (no overhang under the subframe)
- 46° rear tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- Tank 7 litres
- Hydraulic pressure 180 bars
- Wired remote control in cab

FINISH

- Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the sideboard handles
- Double safety device on the upper door hinges

Not available for chassis widths 700 and 740 mm



ENTERPRISE ALUMINIUM MODEL 55*



*Up to 5T5 GVWR

Video available at
www.jpm-group.com





1

Robustness

Identical mechanical resistance to that of the steel three-way tipper



6

Optimised hinge

Stops travel for the sideboard



2

Payload

Additional 284 kg for a 3260 mm aluminium three-way tipper compared with its steel equivalent



7

Long life

Conical pillars with clamping screw and top hinge with double safety device



3

Compass cylinder and high tipping capacity

3T9 for a 3260 mm three-way tipper
(load uniformly distributed)



8

Optimum visibility

Compact: no top cap, optional load stops



4

Double safety handle

Incorporated into the sideboard



9

Reliability of door opening

Direct connection between three-way tipper and hook



5

Resistance and watertightness

Boxed sideboard with sealing lip, large surface for stickers



10

False manoeuvres impossible

Clevis with synthetic contact part: limited wear, ball guidance, no noise

ENTERPRISE ALUMINIUM

MODEL 55*



BODYWORK

- Tipper platform in high quality aluminium sheet: 5083 H16 thickness 3.5 mm
- Side members in extruded box-sections thickness 3 mm height 120 or 140 mm (depending on length) and outer frames in box-sections thickness 3.5 mm under the load surface
- Sideboards in extruded aluminium profile, height 400 mm (385 mm interior), usable interior height 388.5 mm, double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, fold-down, removable, interchangeable (right/left)
- Locking handle incorporated into the thickness of the sideboards
- Front face, usable interior height 450 mm, 450 mm usable, double wall top and bottom, thickness 2.6 mm, single wall, thickness 3.5 mm in the centre
- Cab Protect with aluminium mesh diameter 5 mm with frame in extruded profiles, removable and without top cap
- Aluminium rear door, height 450 mm, double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, automatic opening by cam of 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with tightening fixing bolt and conical fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)
- Tipping on aluminium spherical bearings and clevis, contact on elastomer
- Locking pins in Nickel Zinc treated steel with code (preventing any false manoeuvre)
- Outer frame adapted to lashing
- Short dumping overhang: 340 mm

SUBFRAME

- Aluminium profile tipper, thickness 4.5 to 12 mm
- Tipping by COMPASS CYLINDER (no overhang under the subframe)
- Rear tipping angle of 48° and laterally 45°
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- Tank 3 litres
- Hydraulic pressure 320 bars
- Wired remote control in cab

FINISH

- Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the sideboard handles
- Double safety device on the upper door hinges

Not available for chassis widths 700 and 740 mm



DROPSIDE MODEL 55*

ALUMIN-
IUM

MIXED
ALUMIN-
IUM

STEEL



**Up to 5T5 GVWR*



1

Robustness


Identical mechanical resistance to that of the steel dropside



6

Loading safety

Possibility of strapping on the outer frames and attachment for net incorporated into the sideboard



2

Payload

Additional 114 kg for a 3260 mm aluminium dropside compared with its steel equivalent



7

Long life

Conical pillars with clamping screw and top hinge with double safety device



3

Robustness: front face

The front face is welded to the dropside



8

Optimum visibility

Compact: no top cap, optional load stops



4

Prevention of knocks

Sideboard and door bumper



9

Fuel savings

0.5 L/100 km fuel saving compared with its steel equivalent



5

Resistance and watertightness

Boxed sideboard with watertight lip

DROPSIDE

MODEL 55




BODYWORK

- Dropside platform in high quality aluminium sheet: 5083 H111 thickness 4 mm
- Aluminium U side members and transverse spacers
- Sideboards in tubular aluminium profile, height 350 mm, thickness 2.8 mm, fold-down and removable, interchangeable (right/left)
- Assisted lifting for the sideboard from length of 4260 mm
- Front face , height 450 mm, thickness 2.8 mm
- Cab Protect with aluminium mesh diameter 5 mm with frame in extruded profiles, removable and without top cap
- Aluminium rear door, height 350 mm, thickness 2.8 mm
- Rubber opening stops on sideboards and rear door
- Rear pillars in aluminium, thickness 4 mm, removable, with adjustable fixing bolt and straight fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Outer frame adapted to lashing

FINISH

- Shot blasting + 60 μm zinc powder primer + 60 μm powder paint

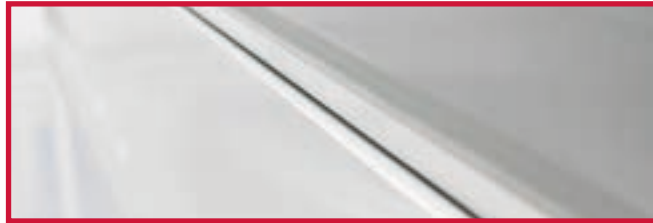



Mixed Aluminium Version

REAR TIPPER

MODEL 55*

ALUMIN-
IUM

MIXED
ALUMIN-
IUM

STEEL



**Up to 5T5 GVWR*

Video available at
www.jpm-group.com






1

Robustness


Identical mechanical resistance to that of the steel tipper



2

Payload

Additional 196 kg for a 3260 mm aluminium tipper compared with its steel equivalent



3

High tipping capacity

4T4 for a 3260 mm tipper
(load uniformly distributed)



4

Double safety handle

Boxed sideboard with sealing lip, large surface for stickers



5

Resistance and watertightness

Boxed sideboard with sealing lip, large surface for stickers



6

Optimised hinge

Stops travel for the sideboard



7

Long life

Conical pillars with clamping screw and top hinge with double safety device



8

Optimum visibility

Compact: no top cap, optional load stops



9

Reliability of door opening

Direct connection between tipper and hook



10

No lubrication

Self-lubricating ring

REAR TIPPER

MODEL 55



BODYWORK

- Tipper platform in high quality aluminium sheet: 5083 H16 thickness 3.5 mm
- Side members in extruded box-sections, thickness 3 mm, height 120 or 140 mm (depending on length) and outer frames in box-sections, thickness 3.5 mm, under the load surface
- Sideboards in extruded aluminium profile, height 400 mm (385 mm interior), double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, fold-down, removable, interchangeable (right/left)
- Locking handle incorporated into the thickness of the sideboards
- Front face, interior usable height 450 mm, double wall top and bottom, thickness 2.6 mm, single wall, thickness 3.5 mm in the centre
- Cab protection in galvanised steel, with mesh (4.5 mm section), removable and without top cap
- Aluminium rear door, height 450 mm, double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, automatic opening by cam of 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with tightening fixing bolt and conical fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication
- Outer frame adapted to lashing
- Short dumping overhang: 250 mm

SUBFRAME

- S355 steel tipper, thickness 4 mm
- Tipping by 3 or 4 expansion cylinder depending on length
- 48° tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the truck
- Tank 7 litres
- Hydraulic pressure 180 bars
- Wired remote control in cab

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the sideboard handles
- Double safety device on the upper door hinges



REMOVABLE TIPPER

MODEL 55*



- ALUMINIUM
- MIXED ALUMINIUM
- STEEL



**Up to 5T5 GVWR*

Video available at
www.jpm-group.com





1

Robustness

Identical mechanical resistance to that of the steel tipper and no risk of rust



6

Prevention of knocks

Sideboard and door bumper



2

Payload

Additional 260 kg for a 3260 mm removable tipper compared with its steel equivalent



7

Long life


Conical pillars with clamping screw and top hinge with double safety device



3

Safety

Patented anti-theft device which fixes on the cradle hook.



8

Optimum visibility

Compact: no top cap, optional load stops



4

Facilitated dumping

In addition to 2 leaves the universal door has manual unlocking towards the bottom



9

Secure loading

Possibility of strapping on the outer frame



5

Aluminium sideboard with watertight lip

When closing the lip settles onto the platform thus ensuring better containment of fine loads



10

Fuel savings

0.5 L/100 km fuel saving compared with its steel equivalent

REMOVABLE TIPPER

MODEL 55



BODYWORK

- MAX. load capacity: 3 T
- Tipper platform in high quality aluminium sheet: 5083 H111 thickness 4 mm
- Longitudinal reinforcement spacers
- Sideboards in tubular aluminium profile, height 350 mm, thickness 2.8 mm, fold-down, removable, interchangeable right/left
- Integrated closing of sideboards
- Front face, height 450 mm, thickness 2.8 mm
- Cab protection in galvanised steel, with mesh (4.5 mm section), removable and without top cap
- Aluminium rear door, height 450 mm, thickness 2.8 mm, 2 leaves and bottom unhooking by manual unlocking
- Stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- 2 rear rolls in aluminium fitted on self-lubricating ring (no greasing)

CRADLE

- Y-shaped side members, height 120 mm, thickness 8 mm
- Centre distance 850 or 1060
- Hook height 920 mm
- Exterior and interior locking

FINISH

- Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Anti-theft device to be padlocked
- STEEL gripper axis diameter 30 welded on a steel pro



DROPSIDE - WOOD PLATFORM

MODEL 55*



- ALUMINIUM
- MIXED ALUMINIUM
- STEEL



**Up to 5T5 GVWR*




1

Robustness
Front face welded to the dropside



2

Payload
Additional 65 kg for a 3260 mm aluminium dropside with wood platform compared with its steel equivalent




3

Box sectioning of the sideboard
Rigidity of the anodised aluminium sideboards



4

Prevention of knocks
Sideboard and door bumper



5

Robustness
Robotised MIG bead welding



6

Lashing on the outer frame



7

Optimum visibility
Compact: no top cap, optional load stops



8

FUEL SAVINGS
0.5 L/100 km fuel saving compared with its steel equivalent

DROPSIDE - WOOD PLATFORM

MODEL 55



BODYWORK

- Aluminium side members, thickness 4 mm
- Aluminium structure, thickness 3 mm
- Multi-ply wood platform, thickness 15 mm, non-skid surface, phenolic resin treatment
- Platform screwed onto 60 mm U-shaped crossbeams, crossbeams spaced at 440 mm intervals
- Retractable lashing rings (TÜV 800 DaN certified) incorporated into the edge, steel, spaced at 880 mm
- Aluminium front face, height 450 mm, welded to the platform
- Aluminium rear pillars, removable, with straight fitting
- Anodised aluminium sideboards, thickness 25 mm, fold-down, removable, interchangeable, height 400 mm
- Locking handles incorporated into the ends of the sideboards
- Anodised aluminium rear door, height 400 mm
- Cab Protect with aluminium mesh diameter 5 mm with frame in extruded profiles, removable and without top cap
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)

FINISH

- Anodised aluminium sideboards
- Aluminium elements: Shot blasting + 60 µm powder primer + 60 µm powder paint





Steel version



GalvaZ: the anti-corrosion treatment for all JPM steel bodywork

- The most effective treatment against corrosion
- Impact- and scratch-resistant
- Suitable for seaside areas or salted roads
- Salt Spray Resistance 2000 h



GalvaZ

=

**ZMA galvanised
steel sheet**

+

**Copper-aluminium
welding**

+

Shot-blasting

+

Powder primer

+

Powder paint

The metal sheet is treated on a standard hot galvanisation line, plunged into a fusion bath, in which the metal composition of the zinc contains 3.5% aluminium and 3% magnesium. This magnesium allows the creation of a stable, durable layer on the entire surface and [guarantees anti-corrosion protection that is much more effective than standard hot galvanisation](#). It also offers a self-repairing protection of the layers. If there is an impact, the metal sheet remains treated. This is the most suitable coating for aggressive environments such as seaside areas and salted roads.

[Non-corrodible welding](#)

Innovative welding process with great stability.

The shot-blasting guarantees the adherence of the paint with controlled deterioration of the galvanisation. The roughness index is 6.2.

After shot-blasting the thickness of the galvanisation is 8 µm without alteration of the galvanisation in the box sections.

Minimum 60 µm layer.

Thermosetting epoxy resin powder with 30% zinc and 12% titanium dioxide.


Long-lasting anti-corrosion protection.

Minimum 60 µm layer.

Paint: thermosetting epoxy resin powder.

Resistant to impacts and scratches.

REAR TIPPER MODEL 55*

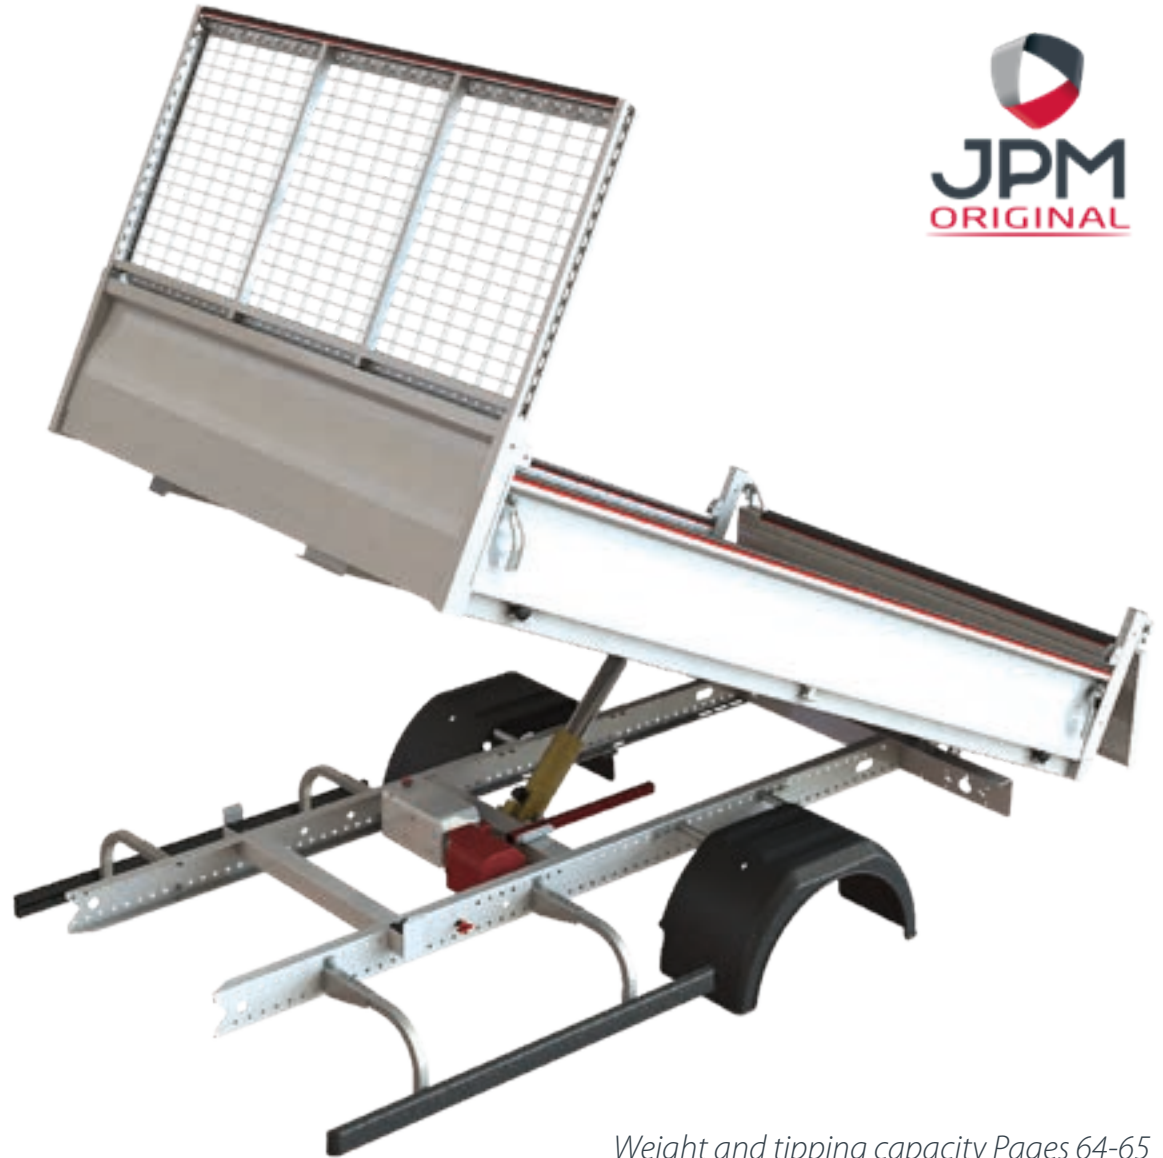


**Up to 5T5 GVWR*

Video available at
www.jpm-group.com






1 GalvaZ
Anti-corrosion treatment



2 Robustness
Robotised MIG bead welding



3 High tipping capacity
4T1 for a 3260 mm tipper
(load uniformly distributed)



4 Long life
Conical pillars




5 Resistance and watertightness
Boxed sideboard with watertight lip



6 Prevention of knocks
Bumpers on sideboards



7 Reliability of door opening
Direct connection between tipper and hook



8 Optimum visibility
Compact: no top cap, optional load stops



9 Large surface for stickers



10 No lubrication
Self-lubricating ring

REAR TIPPER

MODEL 55



BODYWORK

- Tipper platform in galvanised steel sheet HX500, thickness 3 mm
- Rectangular tube side members, height 120 or 140 mm (depending on cylinder) and longitudinal spacers
- Sideboards in galvanised steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Assisted lifting for the sideboard from length of 4260 mm
- Integrated closing of sideboards
- Steel front face H350ZMA, height 450 mm, thickness 2 mm
- Cab protection in galvanised steel, with mesh (4.5 mm section), removable and without top cap
- Rear door in galvanised steel H350ZMA, height 450 mm, thickness 2 mm, automatic opening by cam at 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication (self-lubricating ring)
- Short dumping overhang: 250 mm
- Outer frame adapted to lashing

SUBFRAME

- S355 steel tipper, thickness 4 mm
- Tipping by 3 or 4 expansion cylinder depending on length
- 48° tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- Tank 7 litres
- Hydraulic pressure 180 bars
- Wired remote control in cab

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm epoxy powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the upper door hinges




REAR TIPPER MODEL 75*



**From 5T6 to 7T5 GVWR*


Video available at
www.jpm-group.com






1

GalvaZ
Anti-corrosion treatment



2

Robustness
Robotised MIG bead welding




3

High tipping capacity
7T1 for a 3260 mm tipper
(load uniformly distributed)



4

Long life
Conical pillars



5

Resistance and watertightness
Boxed sideboard with watertight lip



6

Prevention of knocks
Stops on sideboards



7

Reliability of door opening
Direct connection between tipper and hook



8

Optimum visibility
Compact: no top cap, optional load stops



9

Large surface for stickers



10

No lubrication
Self-lubricating ring

REAR TIPPER

MODEL 75



BODYWORK

- Tipper platform in steel sheet HX500, thickness 4 mm
- Rectangular tube side members, height 160 mm and longitudinal spacers
- Sideboards in galvanised steel S350, height 400 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Assisted lifting for the sideboard from length of 4260 mm
- Integrated closing of sideboards
- Steel front face S355, height 450 mm, thickness 2 mm
- Cab protection in galvanised steel, with mesh (4.5 mm section), removable and without top cap
- Rear door in steel S355, height 450 mm, thickness 2 mm, automatic opening (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- Polypropylene fender flares with support in unwrought aluminium
- Approved double bar aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication (self-lubricating ring)
- Short dumping overhang: 250 mm
- Outer frame adapted to lashing

SUBFRAME

- Tipper in S355 steel
- 5 mm thick side members, reinforced wings
- Tipping by 3 or 4 expansion cylinder depending on length
- Tipping capacity depending on length: 6 T (minimum)
- 48° tilt angle
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- Tank 12 litres
- Hydraulic pressure 180 bars
- Wired remote control in cab

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm epoxy powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand



REMOVABLE TIPPER

MODEL 55*



**Up to 5T5 GVWR*

Video available at
www.jpm-group.com





1

Robustness
Longevity of JPM steel bodywork



2

GalvaZ
Anti-corrosion treatment



3

Safety
Patented anti-theft device which fixes on the cradle hook.



4

Facilitated dumping
In addition to 2 leaves the universal door has manual unlocking towards the bottom



5

Aluminium sideboard with watertight lip
When closing the lip settles onto the platform thus ensuring better containment of fine loads



6

Prevention of knocks
Sideboard and door bumper



7

Long life
Conical pillars with clamping screw and top hinge with double safety device




8

Optimum visibility
Compact: no top cap, optional load stops



9

Secure loading
Possibility of strapping on the outer frame



10

Large surface for stickers
Maximum legibility of visuals

REMOVABLE TIPPER

MODEL 55



BODYWORK

- MAX. load capacity: 5 T
- Tipper platform in steel sheet HX500, thickness 3 mm
- Longitudinal reinforcement spacers
- Sideboards in steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Integrated closing of sideboards
- Steel front face H350ZMA, height 450 mm, thickness 2 mm
- Ladder rack in galvanised steel, with mesh (4.5 mm section), removable and without top cap
- Rear door in steel H350ZMA, height 450 mm, thickness 2 mm, 2 leaves and bottom unhooking by manual unlocking
- Stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- 2 rear rolls in aluminium fitted on self-lubricating ring (no greasing)

CRADLE

- IPE 140 side members
- Centre distance 850 or 1060
- Hook height 920 mm
- Gripper axis diameter 30 welded on tubular structure 120 x 60
- Exterior locking

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

SAFETY

- Anti-theft device to be padlocked



DROPSIDE MODEL 55*

ALUMIN-
IUM

MIXED
ALUMIN-
IUM

STEEL



**Up to 5T5 GVWR*



1

Robustness

Identical mechanical resistance to that of the steel dropside



2

GalvaZ

Anti-corrosion treatment



3

Robustness: front face

The front face is welded to the dropside



4

Prevention of knocks

Sideboard and door bumper



5

Resistance and watertightness

Boxed sideboard with watertight lip



6

Loading safety

Possibility of strapping on the outer frames and attachment for net incorporated into the sideboard



7

Long life

Conical pillars with clamping screw and top hinge with double safety device



8

Optimum visibility

Compact: no top cap, optional load stops

DROPSIDE

MODEL 55



BODYWORK

- Dropside platform in steel sheet S355, thickness 3 mm
- U side members in steel S355, thickness 4 mm and transverse spacers
- Sideboards in steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Assisted lifting for the sideboard from length of 4260 mm
- Integrated closing of sideboards
- Steel front face H350ZMA, height 450 mm, thickness 2 mm
- Cab protection in galvanised steel, with mesh (4 mm section), removable and without top cap
- Steel H350ZMA rear door, height 350 mm
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and straight fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Zinc Nickel treated bolts (5 times more resistant than standard galvanising)
- Outer frame adapted to lashing

FINISH

- DKP metal sheet + Shot blasting + 60 µm zinc powder primer + 60 µm powder paint



REAR TIPPER

Interior length (in mm)	Steel Tipper 55		Steel Tipper 75		Mixed aluminium tipper		Aluminium tipper	
	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)
1660	-	-	-	-	288	3.42	268	3.42
1760	-	-	-	-	294	3.13	274	3.13
1860	-	-	-	-	300	2.88	280	2.88
1960	-	-	-	-	307	2.66	286	2.66
2060	-	-	-	-	320	2.48	295	2.48
2160	423	3.56	-	-	326	2.31	301	2.31
2260	442	3.33	-	-	332	2.16	307	2.16
2360	461	3.13	-	-	339	2.03	314	2.03
2460	480	6.06	653	10.4	357	6.36	331	6.36
2560	500	5.74	667	9.8	363	6.04	336	6.04
2660	519	5.45	678	9.3	369	5.75	342	5.75
2760	525	5.18	691	8.9	371	5.48	348	5.48
2860	537	4.94	703	8.5	380	5.23	354	5.23
3010	556	4.6	722	7.9	388	4.90	363	4.90
3160	574	4.31	741	7.4	400	4.60	372	4.60

Weight & tipping capacity

Interior length (in mm)	Steel Tipper 55		Steel Tipper 75		Mixed aluminium tipper		Aluminium tipper	
	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)	Bodywork weight (in kg)	Tipping capacity (in metric tons)
3260	587	4.13	753	7.1	406	4.42	378	4.42
3360	604	3.96	766	6.9	412	4.25	384	4.25
3460	611	3.8	778	6.6	418	4.09	389	4.09
3560	628	3.65	791	6.4	424	3.94	395	3.94
3660	645	5.26	805	7.9	-	-	-	-
3760	664	5.07	818	7.6	-	-	-	-
3860	680	4.9	830	7.4	-	-	-	-
3960	698	4.73	843	7.1	-	-	-	-
4060	715	4.58	855	6.9	-	-	-	-
4160	733	4.43	868	6.7	-	-	-	-
4260	750	4.29	886	6.5	-	-	-	-
4360	768	4.15	898	6.3	-	-	-	-
4460	785	4.02	911	6.1	-	-	-	-
4510	803	3.9	923	6	-	-	-	-

Weight given as an example

THREE-WAY TIPPER

Interior length (in mm)	Enterprise Aluminium Three-way Tipper	
	Bodywork weight (in kg)	Tipping capacity (in metric tons)
2560	405	6.54
2660	411	6.20
2760	417	5.89
2860	423	5.60
3010	432	5.22
3160	440	4.89
3260	446	4.69
3360	452	4.50
3460	458	4.32
3560	464	4.16

Weight given as an example

DROPSIDE

Weight (in kg)

Interior length (in mm)	Steel Dropside	Aluminium Dropside	Aluminium Dropside, Wood Platform
2420	366	200	188
2520	373	206	193
2620	380	212	199
2720	395	218	204
2820	402	224	210
2970	413	233	218
3120	424	242	226
3220	439	248	232
3320	446	254	237
3420	454	260	243
3520	461	266	248
3620	476	272	254
3720	484	278	259
3820	491	284	265
3920	498	290	270
4020	513	296	276
4120	520	302	281
4220	528	308	287
4320	535	314	292
4420	549	320	298
4520	557	326	303

REMOVABLE TIPPER


Weight (in kg)

Interior length (in mm)	Removable Steel Tipper	Mixed Aluminium Removable Tipper
2460	469	243
2560	480	249
2660	490	254
2760	501	259
2860	511	264
3010	526	272
3160	542	280
3260	552	285
3360	563	290
3460	573	296
3560	583	301
3660	594	306
3760	604	311
3860	615	317
3960	625	322
4060	635	327
4160	646	332

JPM SERVICE 

Essential peace of mind when you are working!

- *A local distribution network*
- *3rd year of guarantee free*
- *Online sales of options and spare parts for your bodywork*
- *Bodywork configurator*
- *Quotation request, online After-Sales Service, etc.*

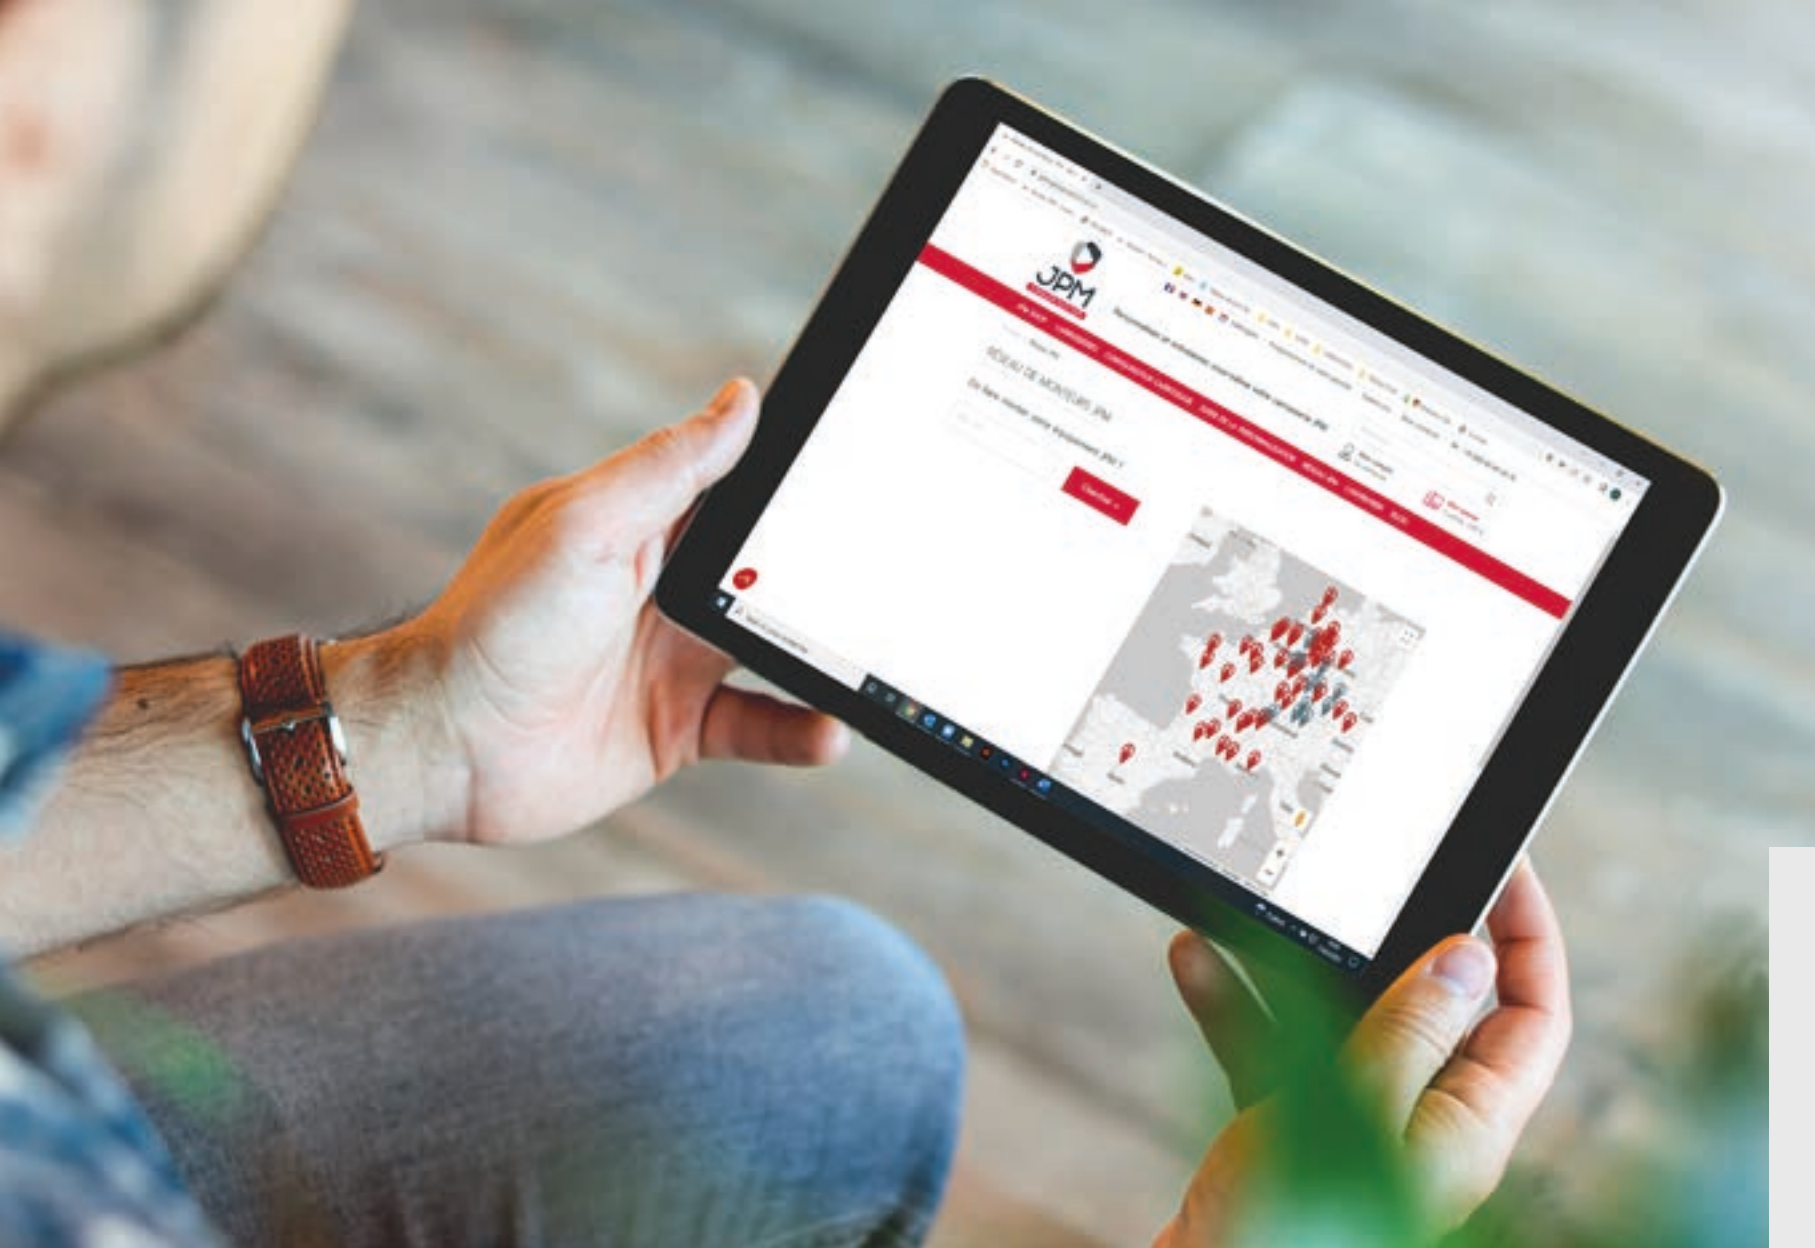

DISTRIBUTION NETWORK

Take advantage of a local JPM network in **Europe!**
Find the coach builder nearest to you on
www.jpm-group.com



Tips



Assembly



Maintenance



JPM

UNE TROISIÈME ANNÉE DE GARANTIE GRATUITE ?

A 3rd year of guarantee for free ?

Après enregistrement de votre carrosserie !

After registration of your conversion !



www.jpm-group.com

Rubrique «Enregistrement de ma garantie»

Section «Registration of your guarantee»

3RD YEAR OF GUARANTEE FREE

Register your new bodywork on www.jpm-group.com

to enjoy a **third year of guarantee free!**

And up to **5 years' guarantee** for your bodywork...



GARANTIE
2 ANS

On purchasing
your bodywork

GARANTIE
3 ANS

3rd year free after
registering your
bodywork

GARANTIE
5 ANS


JPM offers a
2-year additional
guarantee
extension



BODYWORK CONFIGURATOR

A real Bodywork Configurator to be seen at

www.jpm-group.com



Determine
the length your
bodywork




Define your chassis



Find out the
payload of your
truck



Receive your
quotation

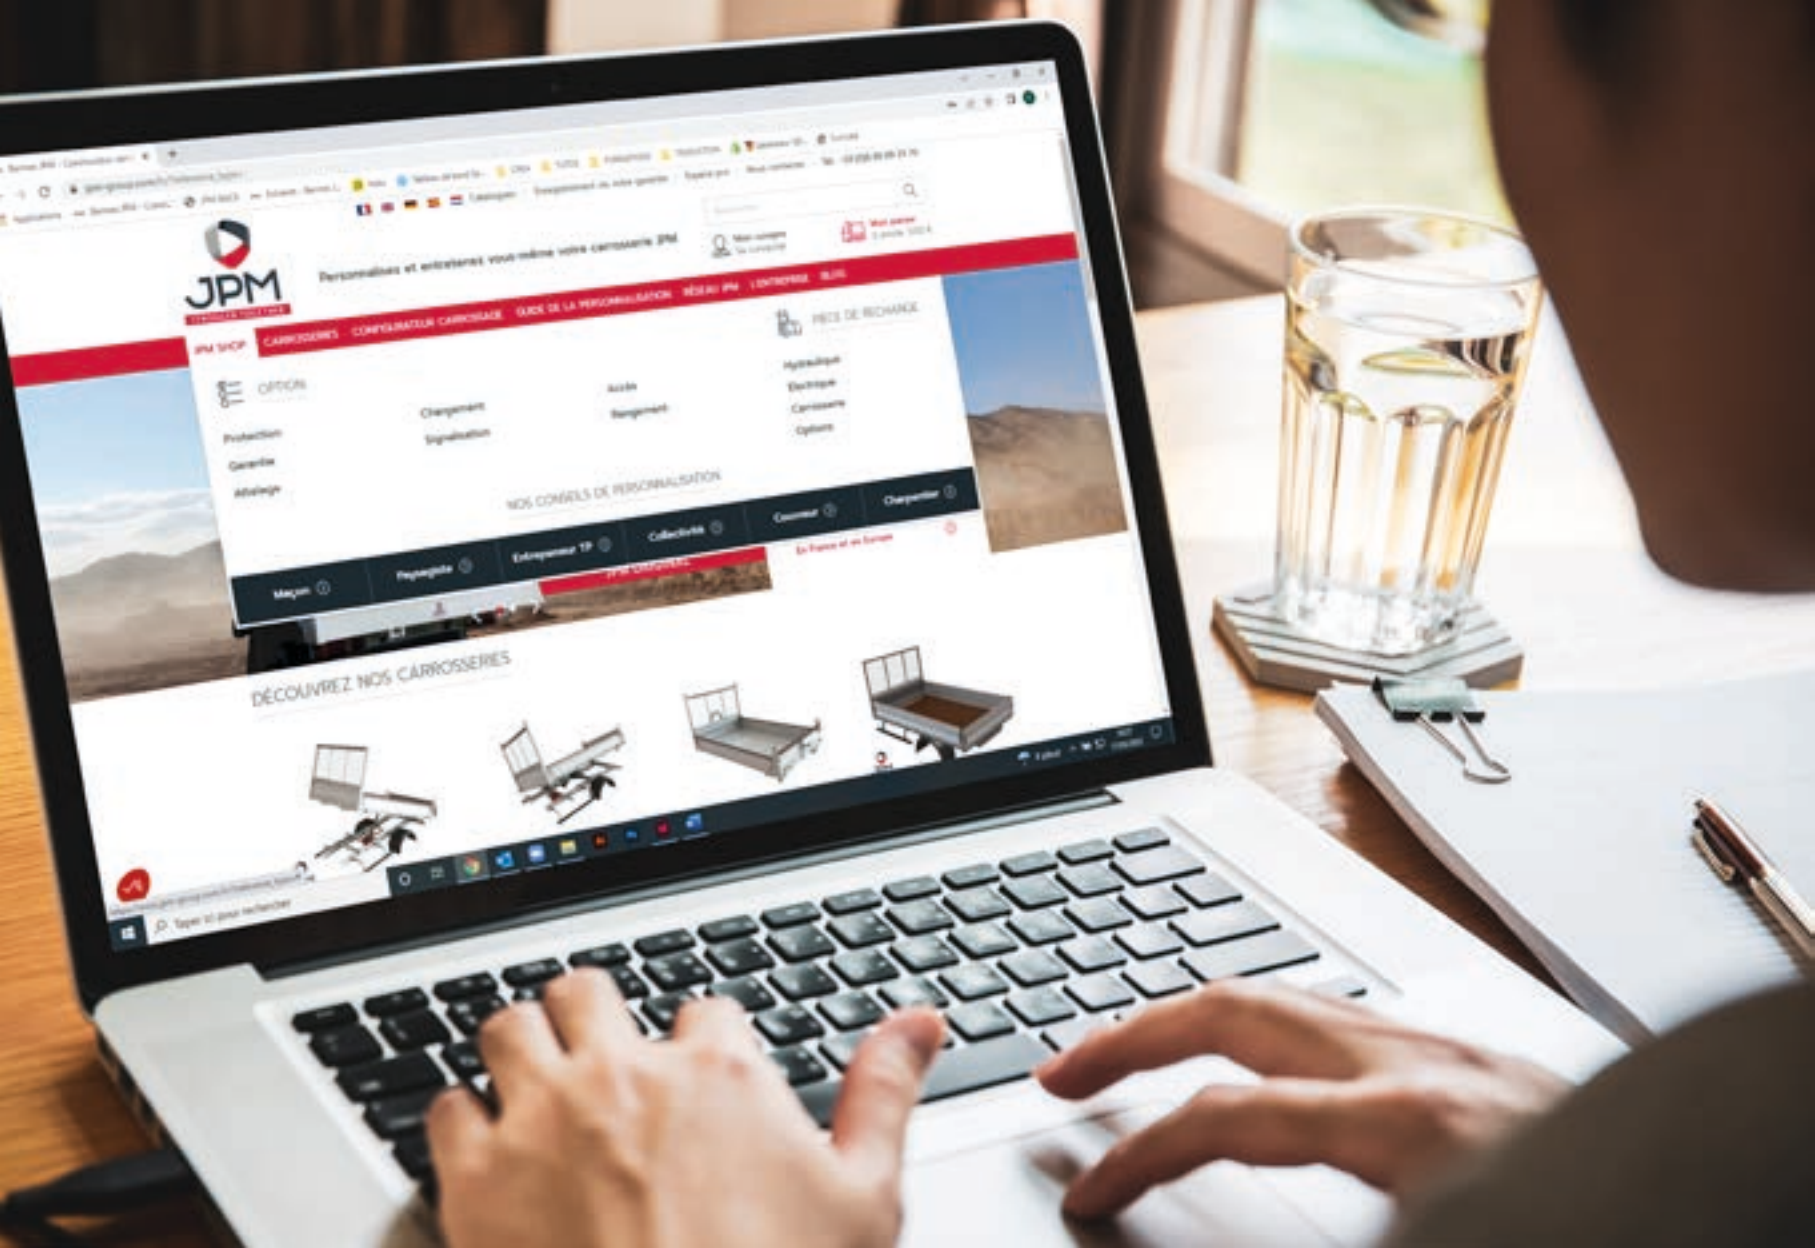

Personnalisez et entretenez vous-même votre carrosserie JPM

JPM SHOP CARRIAGES CONFIGURATEUR CARRIAGE GUIDE DE LA PERSONNALISATION RÉSEAU JPM CONTACTEZ-NOUS

PROTECTION
GARANTIE
ATELAGE

CHARGEMENT
SIGNALISATION
ACCESSOIRES

PIÈCES DE RECHANGE
Hydraulique
Électrique
Carrosserie
Options

NOS CONSEILS DE PERSONNALISATION

Meunier
Pompes
Entrepreneur TP
Collectivité
Casserin
Chargement
En France et au Canada

DÉCOUVREZ NOS CARRIAGES



CUSTOMISABLE BODYWORK



Online sales of options and spare parts at

www.jpm-group.com

Customisable, self-maintaining bodywork



Satisfied or
refunded



Original JPM
parts



Free delivery



JPM

ORIGINAL

It is not just a JPM Original body...


...It's your work tool!



LANDSCAPE GARDENING

• Storage

Tool-holder - 3 tools



A - p.132

Strap storage box



B - p.141

• Work site securing

Cone holder



p.126

Triangle - 2 flashing lights



p.129





• Load securing


Lashing rings



Net



Load stop




Rear beam rack



• Coupling

Triva Entrepriise



• Door

Easydoor





GARDEN MAINTENANCE

• Storage

Box with basket



Strap storage box



• Work site securing

Cone holder



Zebra





• Load securing

Side extensions



D - p.114

Rear extensions



E - p.118

• Tipper access

Sliding step ladder



F - p.146

Access handle



G - p.148

• Coupling

Triva Entrepriise



H - p.157

• Door

Universal door



I - p.101



PRUNING

• Storage

Strap storage box



A - p.141

Stainless steel box



p.140

• Work site securing

Cone holder



B - p.126

Triangle - 2 flashing lights



p.129





• Load securing

Height adjustable protective roof



Side extensions



• Tipper access

Sliding step ladder



Access handle



• Coupling

Triva Entrepriise



• Door

Universal door





CARPENTER ROOFER

• Storage

Strap storage box



Stainless steel box



• Work site securing

Cone holder



Triangle - 2 flashing lights





• Load securing

Cab protection reinforcement



Lashing point



Rear beam rack



Additional bar



• Coupling

Triva Entreprise



• Door

Easydoor





BUILDER

• Storage

Box with basket



A - p.134

Tool-holder - 3 tools



B - p.132

• Work site securing

Cone holder



p.126

Triangle - 2 flashing lights



p.129





• Load securing

Cab protection reinforcement



Lashing rings



Load stop



Additional bar



• Coupling

Triva Entrepise



• Door

Universal door





CIVIL ENGINEERING

• Storage

Box with basket



A - p.134

Tool-holder - 3 tools



B - p.132

• Work site securing

Cone holder




C - p.126

Triangle - 2 flashing lights



p.129



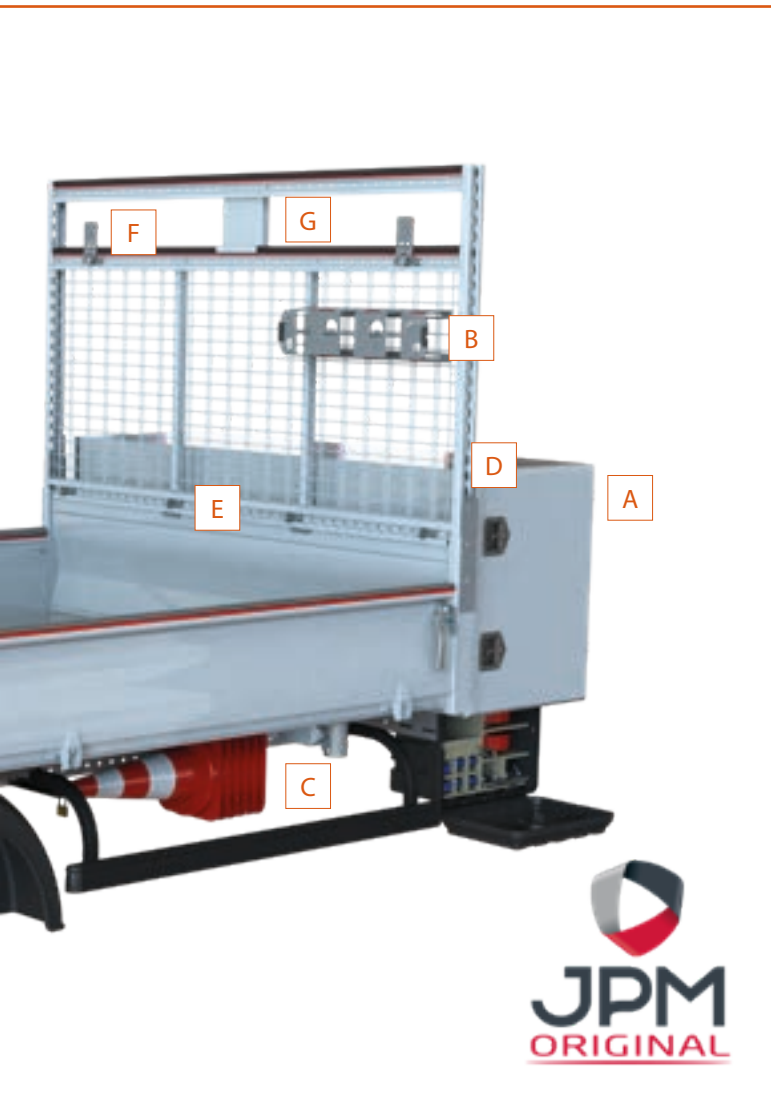

• Load securing

Cab protection reinforcement



Lashing rings



Load stop



Additional bar



• Coupling

Triva TP



• Door

Easydoor





LOCAL AUTHORITIES

• Storage

Strap storage box



A - p.141

Tool-holder - 1 tool



p.133

• Work site securing

Cone holder



B - p.126

Zebra



p.127





• Load securing

Side extensions



C - p.114

Net



p.121

• Tipper access

Sliding step ladder



D - p.146

Access handle



p.148

• Coupling

Triva Entrepriise



E - p.157

• Door

Universal door



F - p.100



All our options,
for even more customisation...



100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper - Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety

Reversing camera

Options

Doors

Steel universal door

- 2-leaf door and automatic release
- Steel frame, thickness 4 mm
- Leaf height 450 mm in S355 steel, thickness 2 mm
- Closure by locking bar on the frame
- Safety lock on locking bar
- Hooks to hold leaves open
- Frame locking for tipping with the leaves open

• **Weight:**

46 kg

• **Material:**

Steel



Universal door

=



Door with automatic release

+



2-leaf door

Aluminium universal door

- 2-leaf door and automatic release
- Aluminium frame
- Aluminium leaf height 450 mm, thickness 3 mm to 4 mm
- Closure by steel locking bar on the frame
- Safety lock on locking bar
- 2 hooks to hold leaves open
- Frame locking for tipping with the leaves open

- **Weight:**
35 kg
- **Material:**
Aluminium



Universal door

=



Door with automatic release

+



2-leaf door

Easydoor door

- Door with automatic release and manual bottom opening
- Steel frame, thickness 4 mm
- Aluminium door leaf, height 400 mm
- Sideboard type handle closure
- Frame locking for tipping with the door leaf open

• **Weight:**

25.7 kg

• **Material:**

Mixed steel and aluminium



Easydoor

=



Automatic release door

+



Manual bottom opening door

Find all our options on
www.jpm-group.com

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper – Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety

Reversing camera

Options

Load securing

Lashing on cab protection

- **Lashing for small equipment**


- 4 rings for 25 mm strap or bungee
- Adjustable over the entire width of the cab protection
- Adaptable on cab protection without tools
- Resistance: 100 kg
- Standard, DIN 580
- Available in after-sales kit

- **Weight:**

0.4 kg

- **Material:**


Galvanised steel or aluminium

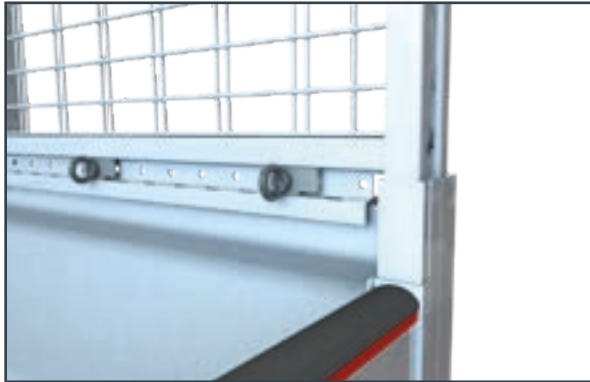

Lashing on the steel tipper platform

- Retractable lashing rings
- To be integrated into the steel platform of the bodywork
- Resistance: 1 T
- Standard, EN12640 1000 daN
- Not available as after-sales kit - factory assembly only


- **Weight:**
1 kg
- **Material:**
Hot galvanised steel

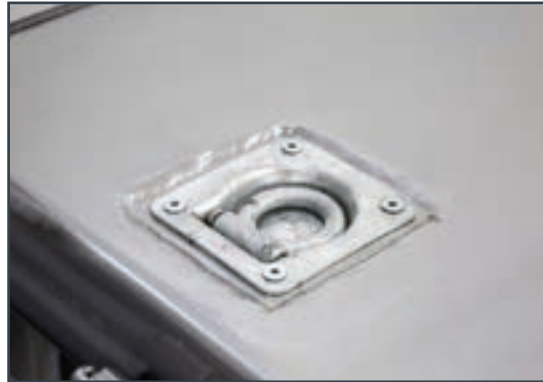

Lashing point

- Lashing for medium/large equipment
- Only adaptable without tools on JPM Original aluminium tipper
- Resistance 1000 daN
- Standard, EN12640
- Available in after-sales kit


- **Weight:**
0.20 kg (part)
- **Material:**
Steel
Zinc/Nickel treatment

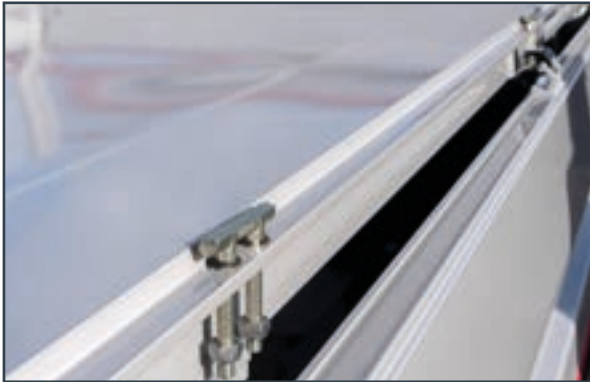

Load stop

- Makes it possible to wedge and strap the load on the cab protection
- Set of 2 load stops - Can be clipped onto JPM cab protection
- Quick, easy assembly and dismantling with a simple thumb wheel
- To be positioned as required on the entire width of the cab protection
- Possibility of strapping (25 mm strap), resistance 500 daN
- JPM patented option
- Thickness: 25 mm
- Dimensions (l x w): 16.5 cm x 11 cm

- **Weight:**
0.74 kg
- **Material:**
Stainless steel

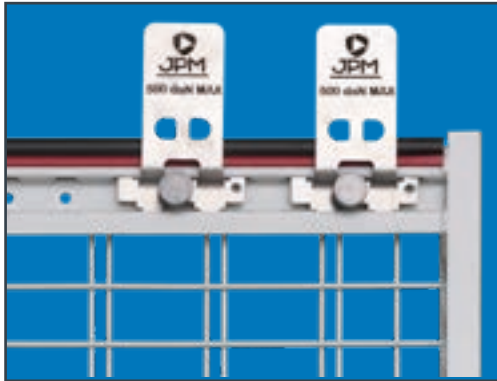

Double bar for cab protection


- Take advantage of this additional bar for transporting long lengths (such as pipes) on a steel mesh ladder rack
- Makes it possible to extend the ladder rack by 250 mm
- Distance between the 2 bars: 165 mm

- **Weight:**

1 kg

- **Material:**

Stainless steel

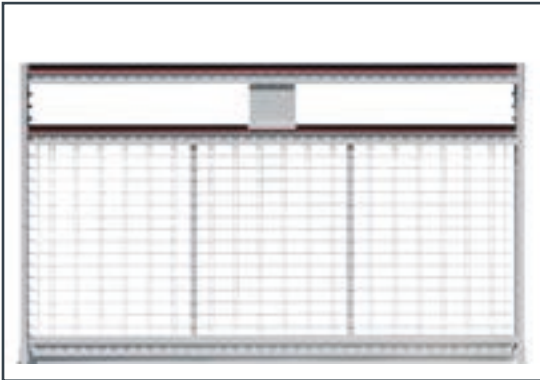

Reinforcement for the cab protection

• Retention reinforcement for the cab protection

- Better protection of the cab when braking (XL standard for cab protection)
- In zinc, nickel treated steel and aluminium - thickness 3 to 4 mm
- Increased stability of the cab protection when under load
- Better connection of the cab protection to the front face
- Enables a 100 kg load increase compared with a standard cab protection
- Only adaptable on a steel mesh cab protection and new model JPM cab protection

• Weight:

4.4 kg

• Material:

Steel and aluminium



Cab protection filling reinforced with polypropylene

- Transform your mesh ladder rack into a solid ladder rack
- Fast, easy installation without the use of tools, for only 12 kg more
- Very resistant, special grinding
- 3 polypropylene plates, thickness 10 mm
- 2 glazing stops in galvanised steel, stainless steel button

• **Weight:**

12 kg

• **Material:**

Polypropylene



Rear beam rack

- Take advantage of this beam rack with adjustable height for transporting long lengths completely safely
- Incompatible with the rear extension
- Maximum load of 300 kg
- Adjustable height by single bolt

- **Weight:**

18 kg

- **Material:**

Steel



Fold-down side extensions in aluminium planks

- Multiply your load volume with these extensions in aluminium planks
- Loading out of sight - Almost zero load losses
- Fold-down aluminium planks: ideal for side loading
- In double skin aluminium planks riveted on aluminium structure
- 300 mm articulation - Fixed part height 600 mm - Thickness 30 mm
- Tubular spacer bar at the rear between the two extensions

- **Weight:**

79 kg

*(for a tipper length
of 3300 mm)*




Straight side extensions in aluminium planks

- Multiply your load volume with these extensions in aluminium planks
- Loading out of sight - Almost zero load losses
- In double skin aluminium planks riveted on aluminium structure
- Height 900 mm - Thickness 30 mm
- Tubular spacer bar at the rear between the two extensions

- **Weight:**

76 kg

*(for a tipper length
of 3300 mm)*

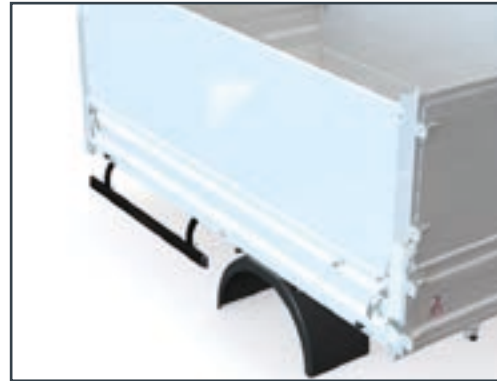

Straight side extensions in perforated aluminium sheet

- Perforated metal sheet welded on a tubular frame
- Straight on the rear
- Thickness: 30 mm
- Hole diameter: 10 mm
- Spacer bar at the rear between the two extensions

• **Weight:**

54 kg

*(for a tipper length
of 3300 mm)*



Side extensions with cut-off corners in perforated aluminium sheet

- Perforated metal sheet welded on tubular frame
- Thickness 30 mm
- Hole diameter 10 mm

• **Weight:**

40 kg

*(for a tipper length
of 3300 mm)*




2-leaf rear extensions in solid aluminium sheet

- 2-leaf rear extension
- In solid aluminium sheet
- Very robust due to the rear pillar common to the universal door
- No spacer bar = facilitated access to the tipper
- Universal door or Easydoor door compulsory

- **Weight:**

36 kg

*(for a tipper width
2000 mm)*

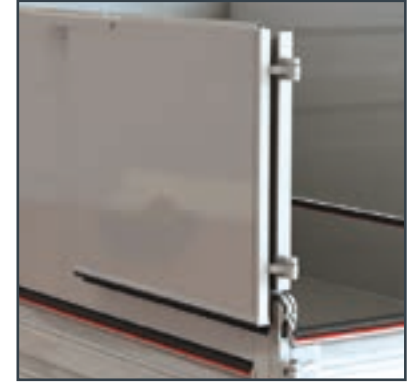

2-leaf rear extensions in perforated aluminium sheet

- 2-leaf rear extension
- In perforated aluminium sheet
- Very robust due to the rear pillar common to the universal door
- No spacer bar = facilitated access to the tipper
- Universal door or Easydoor door compulsory

- **Weight:**

34 kg

*(for a tipper width
2000 mm)*



Height adjustable protective roof

- **Ideal for grinding and totally safe transport**

- Cover in reinforced PVC material (640 g/m²) on cab protection side for better impact resistance and open-work (430 g/m²) for air to pass through on the rear door side
- Easy, gas cylinder-assisted opening, handling by a single person even with the grinder coupled.
- In open position, height on cab protection side: 800 or 900 mm (depending on the cab protection), Height on rear door side: 2000 mm
- Supplied with a storage box that can be used for interior storage
- Available for JPM tippers with lengths of 2800, 2900, 3050 ,3200, 3300, 3500 mm and width 2000 mm
The tipper must be fitted with a universal door or Easydoor, mesh cab protection with polypropylene filling and side extensions in JPM aluminium planks height 900 mm
- Compatible with the 2-leaf rear extension
- Incompatible with pick-up tippers, VW T6, Fuso Canter 6C

- **Weight:**

Structure: 33.5 kg

- **Material:**

Structure: raw aluminium



Tipper net

- Secure your load using this extensible net capable of adapting to all load shapes
- Its synthetic fibre is tear-resistant = 30 mm mesh
- Supplied with 2 types of hook (pulleys and hooks) and a storage bag
- 6 mm bungee cord spliced on the periphery
- 30 polyamide pulleys- 30 aluminium rivets- 30 white plastic hooks

- **Weight:**
Less than 1 kg
- **Material:**
Synthetic



Wireless remote control

- Wireless radio control
- Range 20 m
- Supplied with receiver to be wired
- 2 x LR03 batteries supplied



Find all our options on
www.jpm-group.com

Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper – Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety

Reversing camera

Options

Work site securing

Cone holder

- Geomet treated steel cone holder
- Easy loading and unloading: pivoting outwards
- Equipped with 6 cones (height: 50 cm)
- Closure by pin, possibility of adding a padlock (not supplied)
- Holds 6 cones by a centring unit, adjustable to the number of cones transported
- Can be adapted with bolts on the subframe of the JPM bodywork

• **Weight:**
10.5 kg

• **Material:**
Geomet treated steel



Zebra Class 1 (A)

- Ideal for signalling vehicles working on and near the roadway
- Specifically designed for vehicles operating at speeds of 50 to 90 km/h
- Effective distance: up to 100m
- Resistant to high-pressure washing
- Kit for one vehicle
- Class A approved

- **Material :**

- Special cast PVC film
- Reflective sticker



Zebra Class 2 (B)

- Ideal for signalling on vehicles operating on and around the roadway
- Specific for emergency response vehicles on express routes and motorways
- Excellent performance with high angularity
- Effective distance: up to 500 m
- Resistant to high pressure washing
- Kit for one vehicle
- Class B approved

- **Material:**

- Special cast PVC film
- Reflective sticker



Triangle with electric lift and 2 lights

- Universal signalling bar with electric lift triangle and 2 lights
- AK5 double-sided triangle, 74 mm lights
- Supplied with 6 m wiring harness, switch and fuse.
- Orange LED flashing light: lighting power flashing mode + rotating mode
- Switch in cab
- Approved in France



Flashing light

- LED flashing light to stick on
- 12/24 V orange LED light
- Height 149 mm - Diameter 140 mm



Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper – Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety



Reversing camera

Options
Storage

Tool-holder - 3 tools

- **Tools accessible from the ground**
- Storage for up to 3 tools (max. handle diameter 40 mm) - Dimensions 650 x 170 x 130 mm
- Handle protection with a red EPDM contact clip
- Single filament polyethylene bungee cord to hold tools perfectly
- Adaptable to JPM mesh, solid, and aluminium ladder racks
- Max. 3 tool-holders offset for an 1800 mm ladder rack
- Max. 3 tool-holders for a 2000 mm ladder rack


- **Weight:**
1.6 kg
- **Material:**
Brushed aluminium

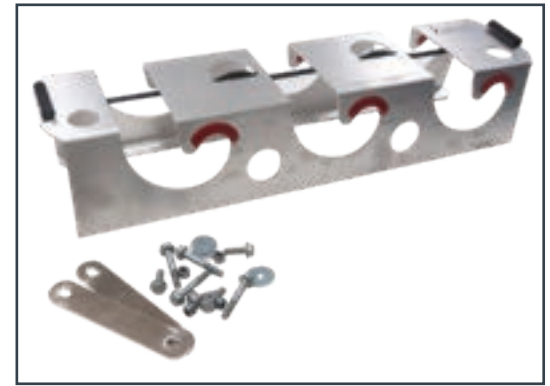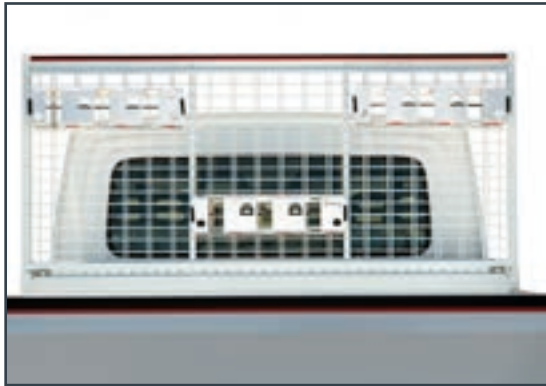

Tool-holder - 1 tool

- Tools accessible from the ground
- Store up to 1 tool (max. handle diameter: 40 mm)
- Tool held optimally by bungee cord - Space-saving (15 x 15 cm)
- Tool-holder in 2 sections making it possible to adapt to the handle length
- Handle protection with contact clip
- Rust-proof: brushed stainless steel
- Possibility of accommodating up to 13 tools for a cab protection with width of 2000 mm
- Tool-holder can be positioned inside or outside the cab protection
- Can be fitted without tools on a JPM steel cab protection and with tools on a JPM aluminium cab protection

- **Weight:**
0.9 kg
- **Material:**
Brushed stainless steel

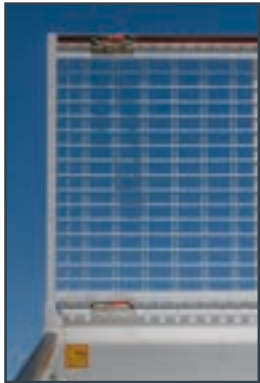

Behind cab storage locker

- **The behind cab locker offers a large secure storage capacity!**
- Available in steel or aluminium
- Door aperture 520 mm for width of boot 600 mm
- Door aperture 720 mm for width of boot 800 mm
- Recessed closures with lock, possibility of closure by padlock (padlock not included)
- Doors held open by gas cylinder
- No risk of stumbling when loading: smooth walls and locker bottom
- Lashing rings in each corner
- Storage box delivered with galvanised steel subframe extension

- **Steel:**
Between 110 and 190 kg
2 mm thick
- **Aluminium:**
Between 70 and 110 kg
3 mm thick

- Dimensions - l x w x h (en mm):

Locker Length 600 mm:

600 x 800 x 1800
600 x 800 x 2000
600 x 1150 x 2000
600 x 1300 x 1800
600 x 1300 x 2000
600 x 1500 x 2000

Locker Length 800 mm:

800 x 800 x 1800
800 x 800 x 2000
800 x 1150 x 2000
800 x 1300 x 1800
800 x 1300 x 2000
800 x 1500 x 2000

600 x 800 x 1700
600 x 1300 x 1700) *Only available in steel*



Shelves for behind cab locker

This shelving will increase your storage capacity in the locker


- All birch plywood - Thickness 12 mm - Max. load per shelf: 35 kg
- One non-slip face made up of small crosses 220 g/m² - Edges treated with acrylic paint
- Smooth opposite face with dark brown film 120 g/m²
- Possibilities:
 - one shelf on the locker height 800 mm
 - 2 shelves for the locker height 1300 mm
 - 3 shelves for the locker height 1500 mm

• **Weight:**

10 kg

• **Material:**

Plywood

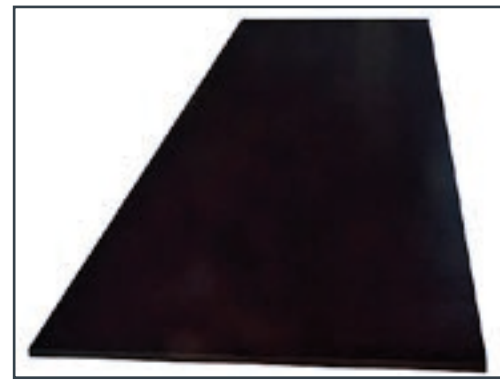

Mat for shelf or basket

- **Perforated non-slip mat**
- To be positioned in the basket, in the bottom of the locker or on a shelf
- Perforated non-slip mat
- Thickness 16 mm
- Mat in 2 sections along the length

- **Weight:**
Between 2.6 and 2.8 kg
- **Material:**
Natural rubber



Mesh basket on the behind cab storage locker

- This mesh basket keeps the tools you use most often close to hand.
- Additional storage above the boot
- Height: 2500 mm
- Hole diameter 10 mm
- Perforated aluminium basket for JPM luggage compartment
- Bolted to the top of the cab back box
- For boot dimensions : 600 x 1800, 600 x 2000 and 800 x 2000
- Not compatible with a 1500 mm high boot

- **Weight:**
12 kg
- **Material:**
Aluminium



Polyurethane locker under the tipper

- This locker offers a new secure, hermetically sealed storage space
- Fixed in the vehicle's wheelbase
- Locker locked by a key - makes it possible to store your equipment with peace of mind
- Supplied with fixing supports
- Dimensions (mm):
 - L500 x H400 x D370 (N1 and N2 approved)
 - L500 x H350 x D300 (N1 and N2 approved)
 - L700 x H330 x D350 (only N1 approved)

- **Weight:**

7 kg

- **Material:**

Polyurethane



Stainless steel locker under the tipper

- This locker offers a new secure, hermetically sealed storage space
- Fixed in the vehicle's wheelbase
- Locker locked by a key - makes it possible to store your equipment with peace of mind
- Supplied with fixing supports
- Dimensions (mm):
 - L500 x H400 x P370
 - L700 x H400 x P370

- **Weight:**

6 kg

- **Material:**

Stainless steel



Strap storage box

- Locker In polyurethane - dimensions: L200 x H150 x D120 mm
- Fitted with 4 x 25 mm straps, 2 x 50 mm straps, hooks with closed fingers
- Coiling system for straps
- Storage lockers
- Load-holding net
- Key locking for locker

- **Weight:**

14.5 kg

- **Material:**

Polyurethane



Locker with cut-off corners in the tipper

- Storage space in the tipper
- Dimensions (mm): 600 x 549/635 x 1975
- In aluminium - thickness 2.7 mm
- Door opening: 440 x 1770 mm
- Handle on the top
- Closure by 2 toggle latches that can be padlocked (padlock not supplied)
- Door open latch
- Available in White or Grey RAL 7004

- **Weight:**
49 kg
- **Material:**
Aluminium



Feet for locker in the tipper

- Set of two fixing feet in steel
- Dimensions: H 350 mm x width 600 mm
- Can be adapted with bolts on the tipper platform
- Compatible with locker height 800 (see Page 136)

• **Weight:**
14 kg the set

• **Material:**
Steel



Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper - Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety

Reversing camera


Options

Tipper access

Sliding step ladder

- Access the inside of the tipper easily using this sliding step ladder
- Attached on the left or right under the rear universal door (compulsory for this option)
- Step ladder with three non-slip steps
- Incompatible with three-way tipper, removable tipper and tipper width of less than 2000 mm

- **Weight:**
6 kg
- **Material:**
Galvanised steel

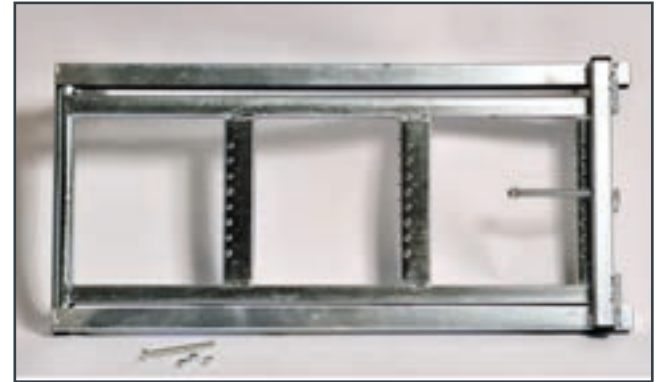

Step

- Tipper access facilitated with the non-slip step
- Possibility of fixing several per body on the sideboards and/or the Easydoor rear door
- Galvanised steel plate step
- Can be folded with automatic locking at 90°
- Max. load: 150 kg
- Fixed by bolts

- **Weight:**

1.3 kg

- **Material:**

Galvanised steel



Access handle

- With this handle access the interior of the tipper more easily and safely
- Non-slip handle
- “Plastic” handle reinforced with a metal core
- Compatible with 2-leaf rear extensions

- **Weight:**
0.2 kg
- **Material:**
PVC



Find all our options on
www.jpm-group.com

Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper - Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety



Reversing camera

Options
Protection

PVC protections

- Available on sideboards, rear door, ladder rack and rear beam rack
- Shock absorption with flexible PVC on the top
- Performance and resistance at high and low temperature provided by a rigid PVC base
- Fits the profile to be protected perfectly, thickness 10 mm
- High-performance attachment (rivets)
- Incompatible with the door of the dropside, wood platform
- Adaptable only on JPM bodywork

- **Weight:**
Between 1.2 kg and 1.5 kg
- **Material:**
Flexible and rigid PVC

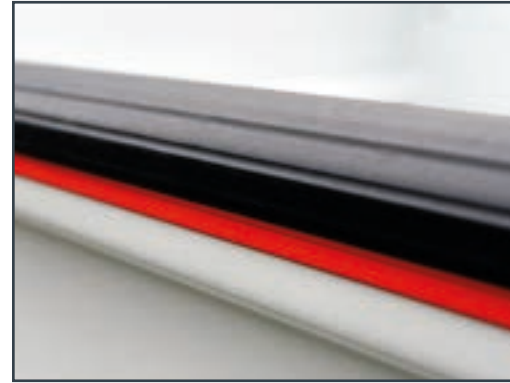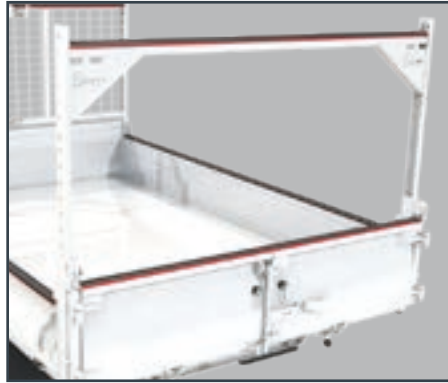

Light grilles

- Protect your vehicle's lights from impacts with these grilles
- UTAC-certified light grilles
- Wire diameter: 6 mm and 2 mm
- Assembled by welding
- Anti-corrosion treatment
- Held in place by the light fixing

- **Weight:**
About 1.5 kg
- **Material:**
Steel



Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper – Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Enterprise

160|Safety

Reversing camera

Options
Coupling

- A single device for your coupling and your ICC bar with 2 coupling solutions
- Triva TP = Rear ICC bar + Head stock + 2 coupling heights
- Triva approved in compliance with UN Regulations 55R01 and 58R03
- Head stock approved up to GVWR ≤ 9 T
- ICC bar approved up to GCWR ≤ 5.5 T
- 2 towing heights:
 - Ball hook at regulation height
 - Clevis hitch adhering to the regulatory clearance of the ball and ideally positioned for drawbar eye


- **Weight:**
Between 52 kg and 56 kg
- **Material:**
Steel



Caution: For the fitting of a TRIVA with hook, check carefully that the vehicle is a towing vehicle.

- A single device for your coupling and your ICC bar with one coupling solution
- Triva Entreprise = ICC bar + Head stock + 1 coupling height
- Head stock approved up to GVWR ≤ 11 T (depending on the vehicle)
- ICC bar approved up to GCWR ≤ 7.5 T (depending on the vehicle)
- One coupling height: mixed hook

- **Weight:**
Between 25 kg and 30 kg
- **Material:**
Steel

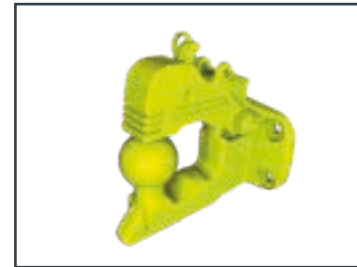

Caution: For the fitting of a TRIVA with hook, check carefully that the vehicle is a towing vehicle.

Options

100|Doors

Universal doors - Easydoor

106|Load securing

Lashings - Load stops - Options for cab protection - Beam rack - Side extensions - Rear extensions - Height adjustable protective roof - Tipper net - Wireless remote control

126|Work site securing

Cone holder - Zebra Class 1 - Zebra Class 2 - Triangle - Rotating flashing light

132|Storage

Tool-holder - Behind cab storage locker - Accessories for behind cab storage locker - Locker under the tipper – Locker in the tipper - Strap storage box

146|Tipper access

Sliding step ladder - Step - Access handle

152|Protection

PVC protections - Light grilles

156|Coupling

Triva TP - Triva Entreprise

160|Safety

Reversing camera

Options
Safety

Reversing camera

- **Rear view kit, 7-inch digital screen - Camera IP69K**
- For IVECO DAILY and RENAULT X 62 trucks only
- This kit includes: 1 x 7-inch digital colour screen + 1 camera + 20 metres of cable + 1 wireless remote control
- Monitor fixed by 1 central foot
- Possibility of connecting a maximum of 2 cameras with alternating viewing on the screen



• Screen:

Type: Digital Type 16/9
 Screen size: 7-inch
 Resolution: 800 x 480
 Luminosity: 450 cd/m²
 Contrast: 500:1
 Loudspeaker: No
 No. of cameras possible: 2
 Power supply: 12/24 V.
 Dimensions: 180 x 121 x 23 mm

• Camera:

Case: Aluminium
 Type: Sharp CCD
 Visual angle: 120°
 Water resistance: IP69K
 Horizontal resolution: 600 lines
 Sound: No
 Number of LEDs: 6
 Night vision: 6 to 8 metres
 Dimensions: H 55.7 x L 67 x Thickness 59 mm
 Day/night detection: Automatic

*JPM reserves the right to make changes to this catalogue without prior notice.
Non-contractual photos and images*

